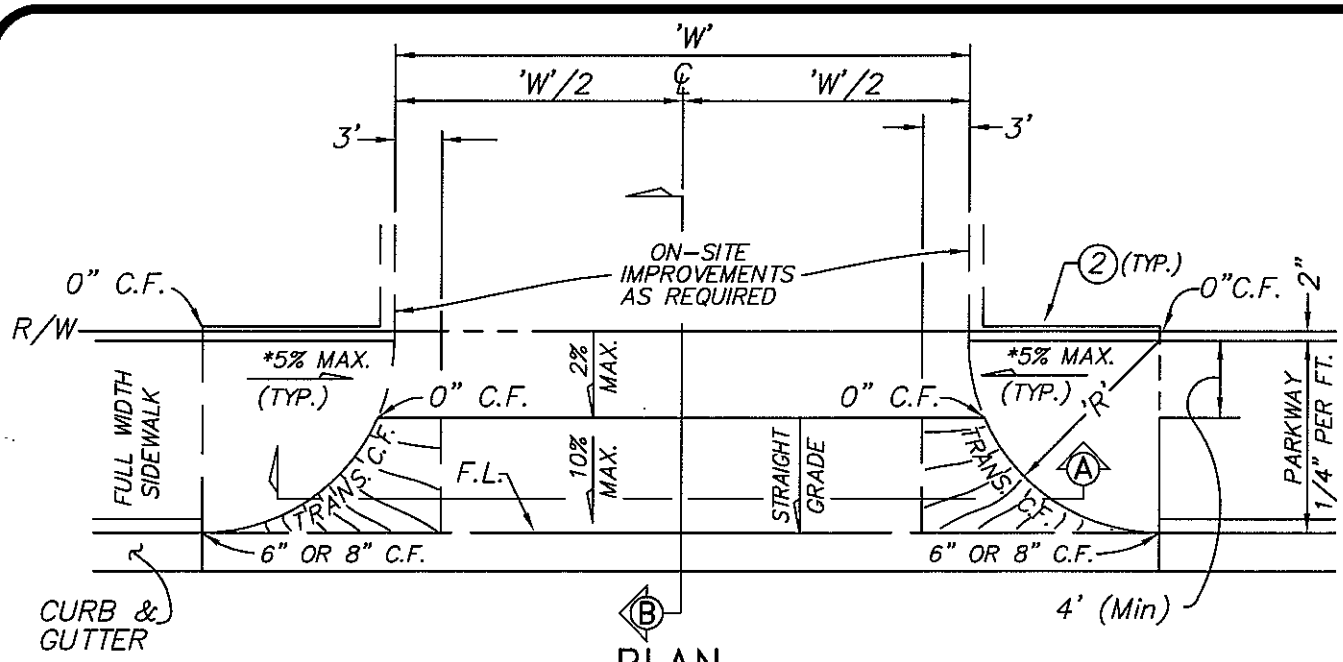

PLAN

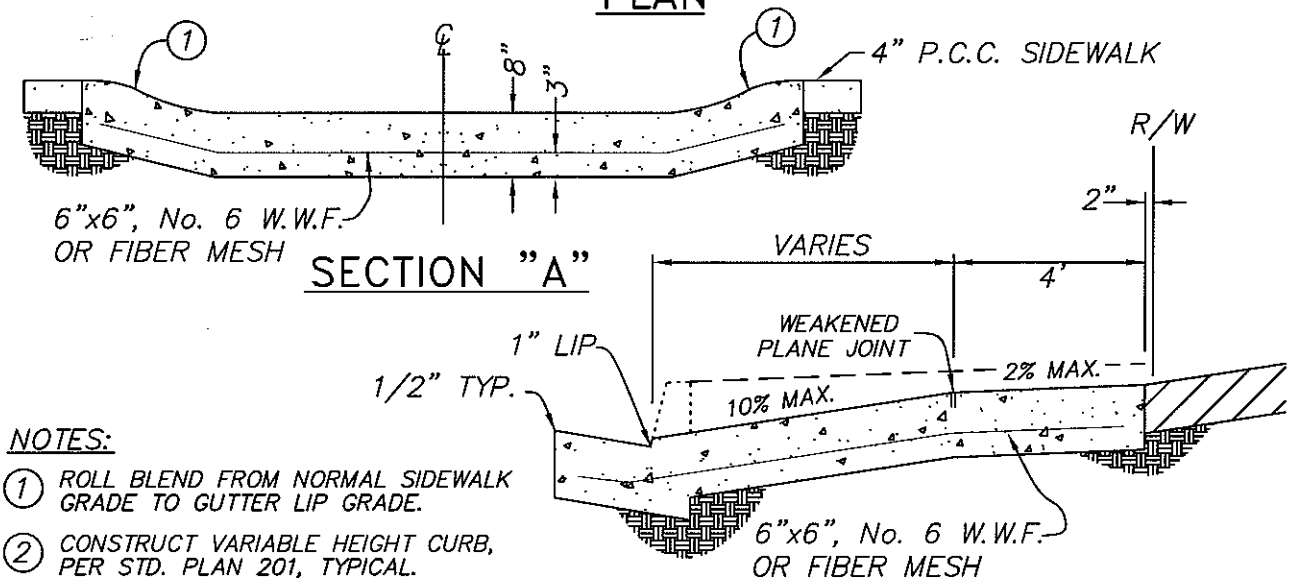

SECTION "A"

SECTION "B"

NOTES:

1. ROLL BLEND FROM NORMAL SIDEWALK GRADE TO GUTTER LIP GRADE.
2. CONSTRUCT VARIABLE HEIGHT CURB, PER STD. PLAN 201, TYPICAL.

GENERAL NOTES:

1. DIMENSIONS 'W', 'R', AND PARKWAY WIDTH SHALL BE SHOWN ON PLANS.
2. 'R' EQUALS PARKWAY WIDTH BUT IT SHALL NOT BE LESS THAN 8' NOR MORE THAN 15'.
3. A COURSE BROOM FINISH TRANSVERSE TO THE LINE OF TRAFFIC SHALL BE USED ON THE APPROACH OTHER THAN THE CURB AND GUTTER AREA. THE CURB AND GUTTER AREA SHALL HAVE A LIGHT BROOM FINISH PARALLEL TO THE LINE OF TRAFFIC.
4. VERTICAL OBJECTS SUCH AS FIRE HYDRANTS AND POWER POLES SHALL BE A MINIMUM OF 5' FROM THE B.C.R. AND/OR E.C.R.

*5. SLOPES EXCEEDING 5% SHALL REQUIRE A SEPARATE DETAIL FOR THE ACCESS RAMPS.

6. CONCRETE SHALL BE 560-C-2500.

APPROVED:

CITY ENGINEER

REVISION DATE: May 2008

CITY OF HUNTINGTON BEACH

DEPARTMENT OF PUBLIC WORKS

COMMERCIAL AND INDUSTRIAL DRIVE APPROACH

STANDARD PLAN 211 1 of 2